


## DRY HIP / RIDGE JUNCTION


Where two hips meet a dry ridge, the intersection should be weathered by a soaker or saddle. This may be made from lead or an equivalent flashing material. The saddle size that most specifications require is a minimum of 450 x 450mm.

The cut hip and ridge tiles need to be drilled and require one additional mechanical fixing per tile.

Soaker

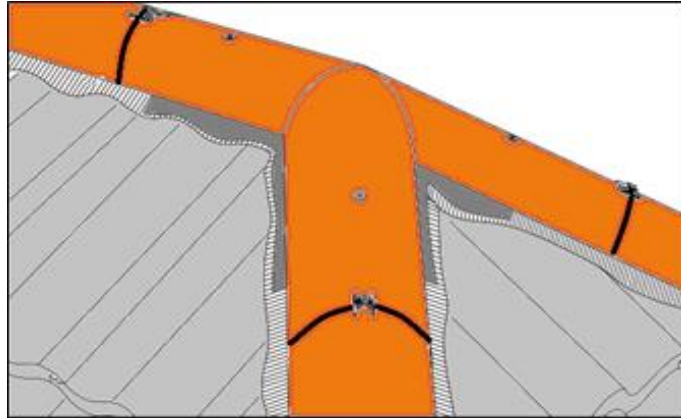

Saddle

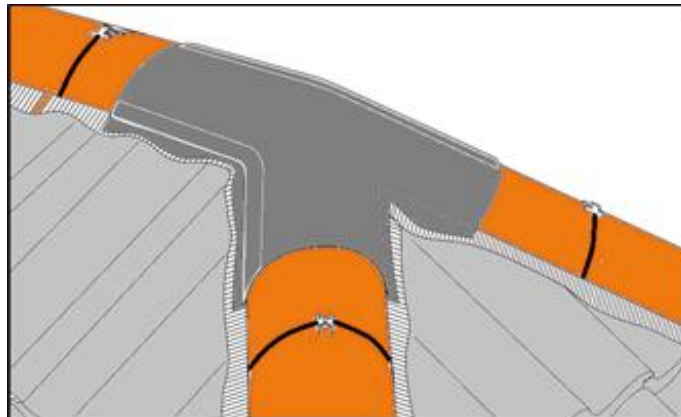

*Alternatively* ridge and hip tiles bonded permanently at the joint in situ to the adjacent tile with Nitomortar UA manufactured by Fosroc or similar equal 2 part epoxy resin in accordance with their instructions.

Fosroc International Ltd

**Address:**

Drayton Manor Business Park  
Coleshill Road  
Tamworth  
Staffordshire  
B78 3XN  
Fosroc International Ltd